

## 223-45 MOTIF 42" DIA PENDANT INSTALLATION INSTRUCTIONS

### WARNING

**DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE  
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**

### CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead. In older buildings it is always good practice to reconfirm the polarity of the wiring.

### NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The heavy duty strap and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.
- This fixture is supplied with a 4-pcs. stem. There is one 6" section, two 12" section and one 18" section. This feature allows the fixture to be mounted with a stem up to 48" in length in 6" increments.
- This fixture is supplied with a swivel. By rotating the canopy the fixture may be mounted to angled ceiling.

#### FIXTURE PREPARATION

1. Remove the fixture, glass parts and parts bag(s) from the carton.

#### NOTICE:

- Before discarding the carton, double check to make certain that all parts are found.

#### FIXTURE INSTALLATION

1. Attach the **SAFETY CABLE** to the building structure or brace (The green screw should face down) (See figure-1).

#### NOTICE:

**THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.**



#### WARNING

**REFER TO THE ILLUSTRATION FOR CORRECT AND SAFE INSTALLATION OF SAFETY CABLE. FAILURE TO FOLLOW THIS INSTRUCTION COULD RESULT HARM/DAMAGE TO THE FIXTURE, PROPERTY AND/OR PERSON(S)!**

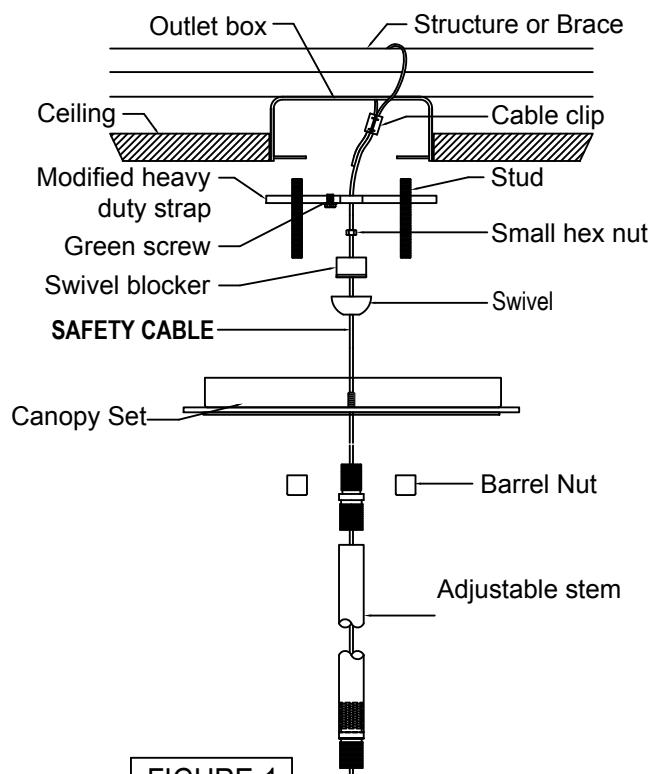


FIGURE-1

2. Determine the overall desired length of the fixture. Tape the end of the leads to a stiff wire (coat hanger) to aid in pulling them through the stems. Place the canopy onto the stem. Assemble the top stem section, decorative breaker, fixture stem and swivel. Place the swivel block over the stem connector of the canopy and thread the hex nuts onto them.
3. Attach the heavy duty strap to the outlet box. Thread the studs into the heavy duty strap at the spacing that matches the mounting holes in the canopy. Adjust the screw so they extend 3/16" beyond the canopy.
4. Cut off the excess ground and fixture wire 6" beyond the canopy. Strip 1/2" of insulation from the ends of the wire. Twist the wire stands together.
5. Fasten the ground wire to the yellow/green striped wire in the outlet box.



### WARNING


Never fasten the ground wire to the brown or "hot" wire! Failure to follow this instruction could result in serious injury or death!

6. Fasten the fixture lead with the ridge(s) to the white wire in the outlet box. Fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener.



### WARNING

Make sure that there is no exposed wire or strands that could cause a dangerous short circuit!

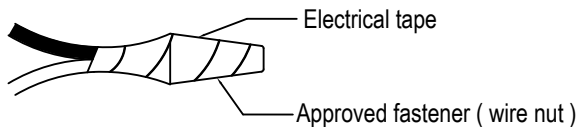

7. Connect the black fixture lead to the black wire in the outlet box. Fasten the joined wires as in step 6.
8. Place the glass and stainless plate into place. (See Figure 2 and 3)  
NOTE: For center glass (E) placement, put the glass to the holder (F) first then place it to the fixture frame.
9. Attach cable wire to griplock. (See Figure 4)


10. Place glass bowl into place. (See Figure 5)
  - A. Thread the stud to the bushing on frame.
  - B. Put the spacer then the silicon washer to the stud.
  - C. Place the glass bowl, align the holes to the studs.
  - D. Insert the coupling to the holes of the glass. (See Figure 6)
  - E. Put the silicon washer, flat washer and safety cable holder.
  - F. Thread the acorn nuts to the studs then loop the safety cable to the holder then secure with the cable clamp.
11. Place the bulbs into place. (See Figure 6)  
NOTE: This fixture is rated for 60W medium based type A light bulb.



### WARNING

DO NOT EXCEED RECOMMENDED WATTAGE!

9. Restore power to circuit at breaker or fuse box.

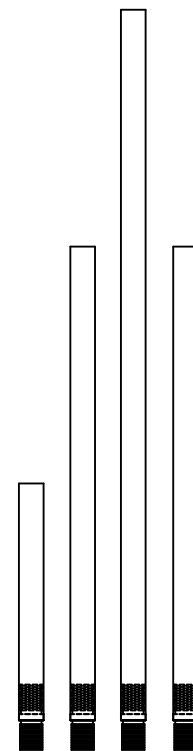

Adjustable Stem


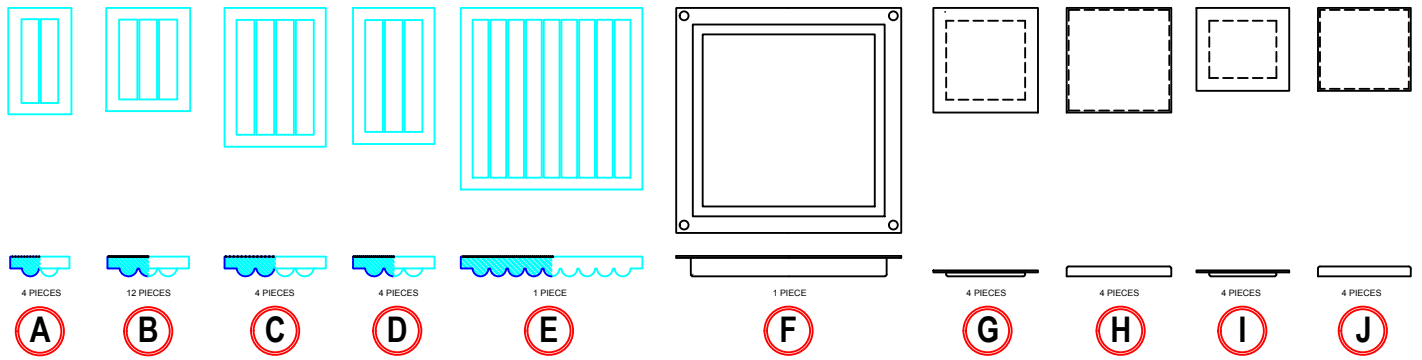


FIGURE-2

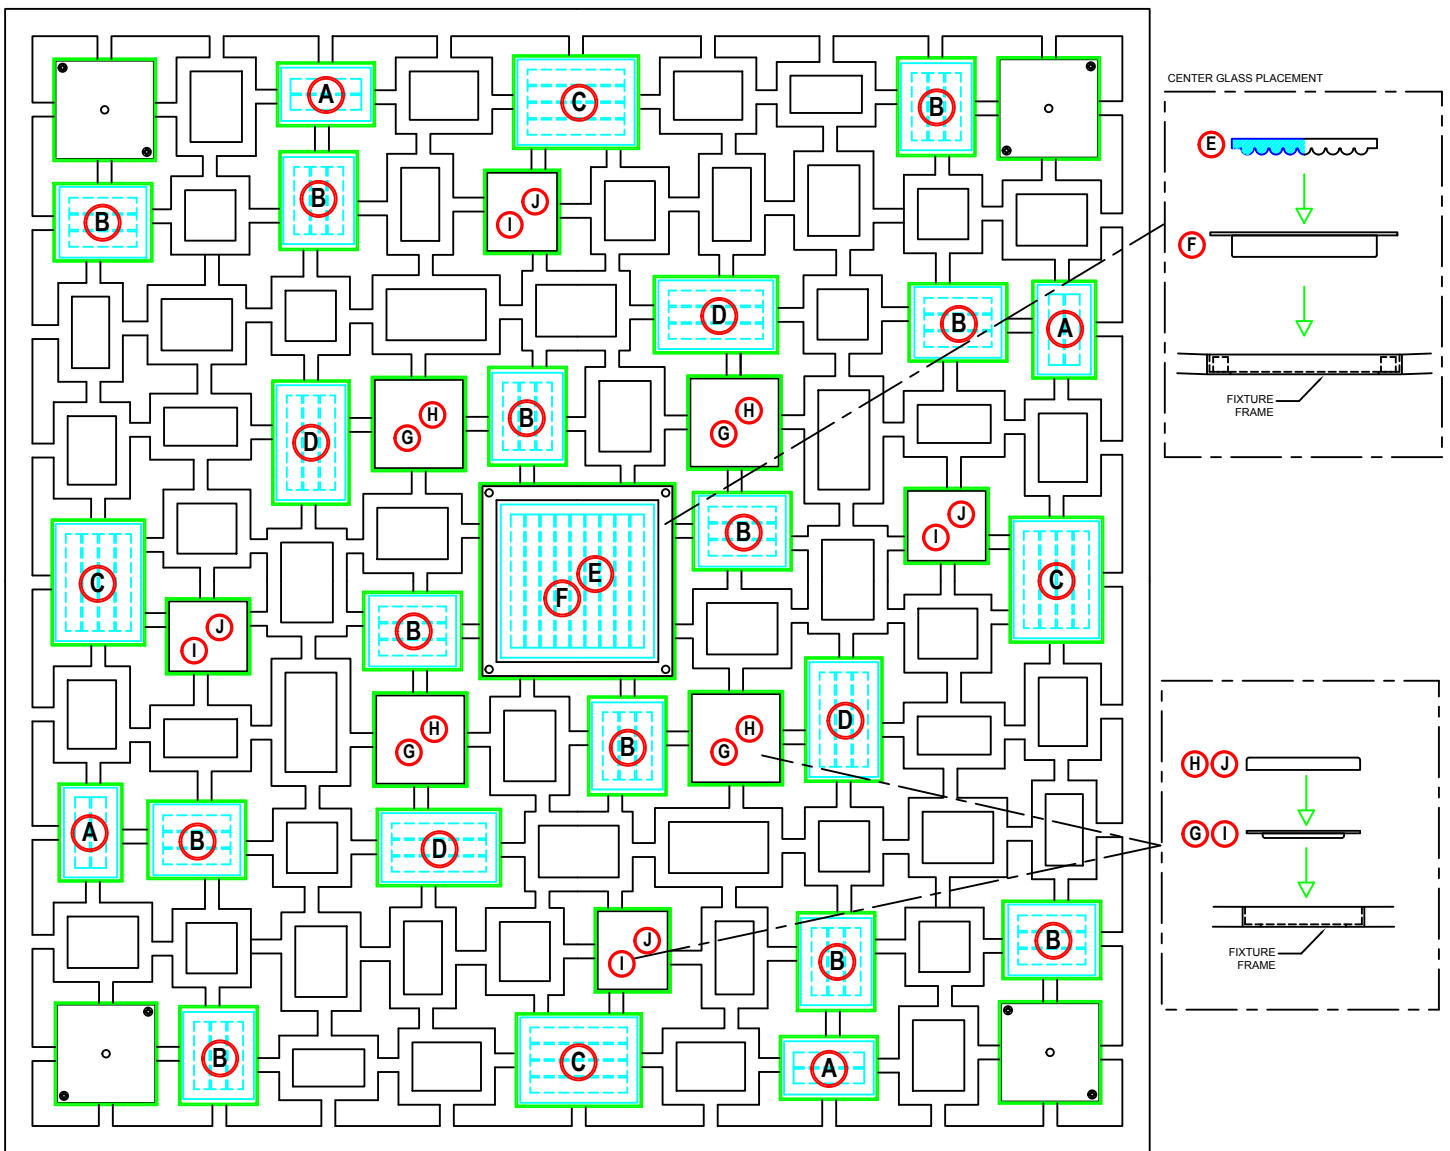

TOP VIEW

FIGURE-3

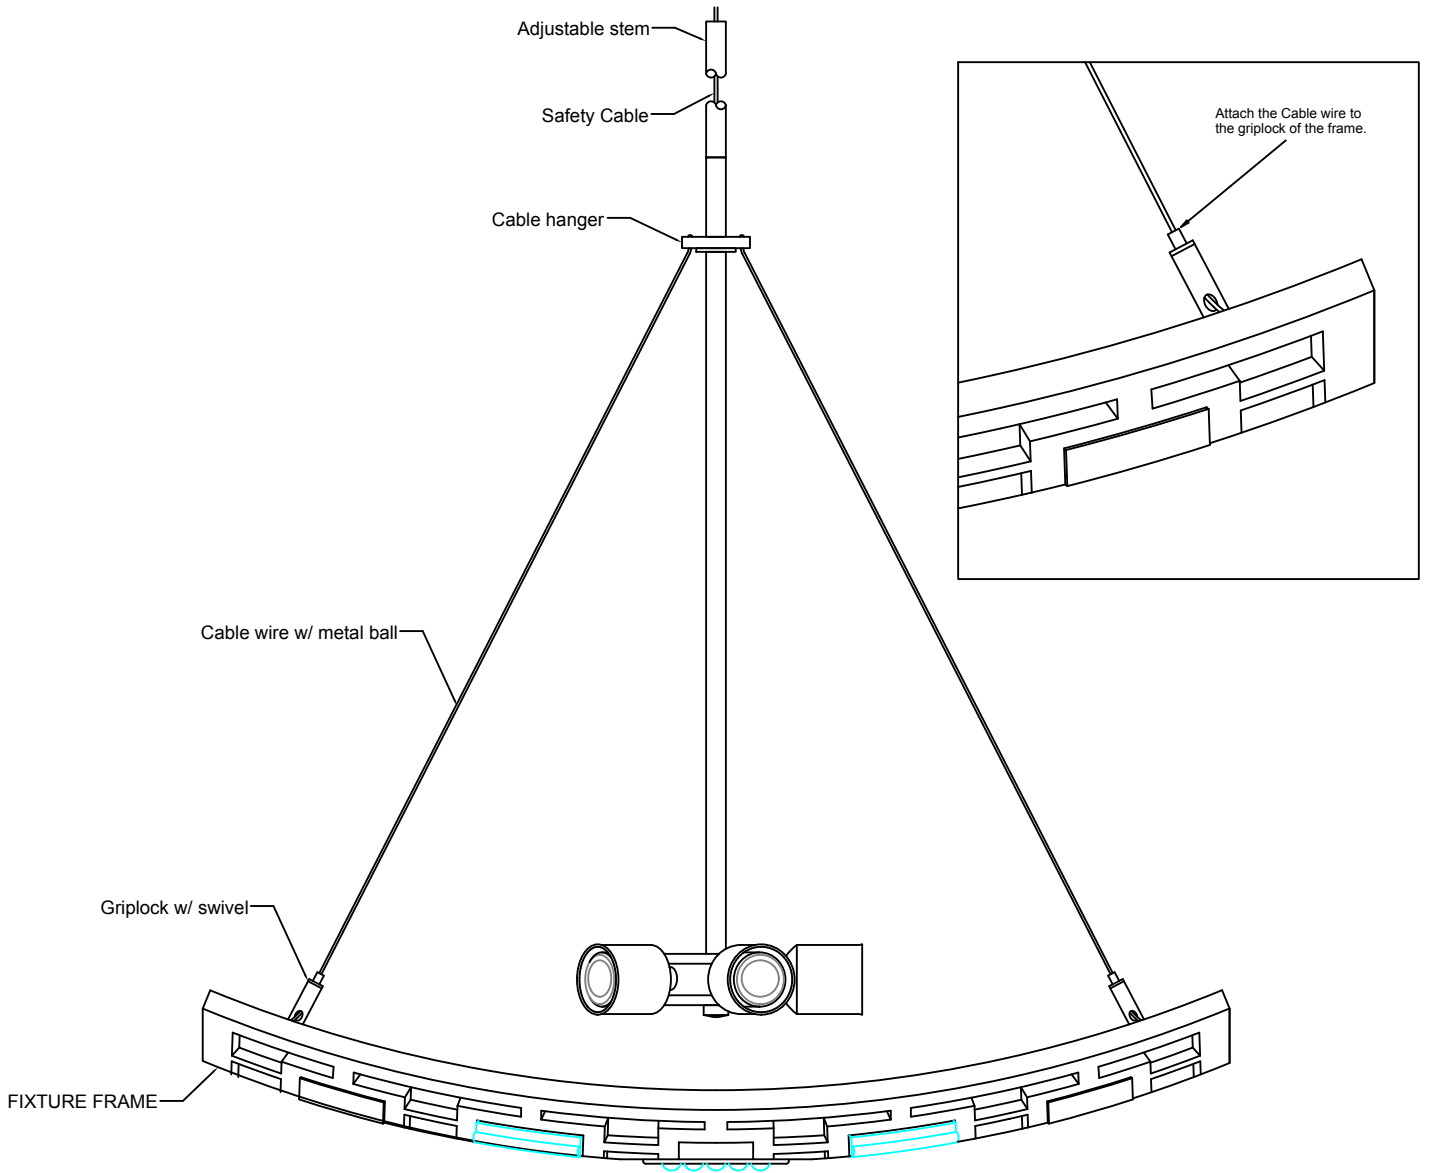


FIGURE-4

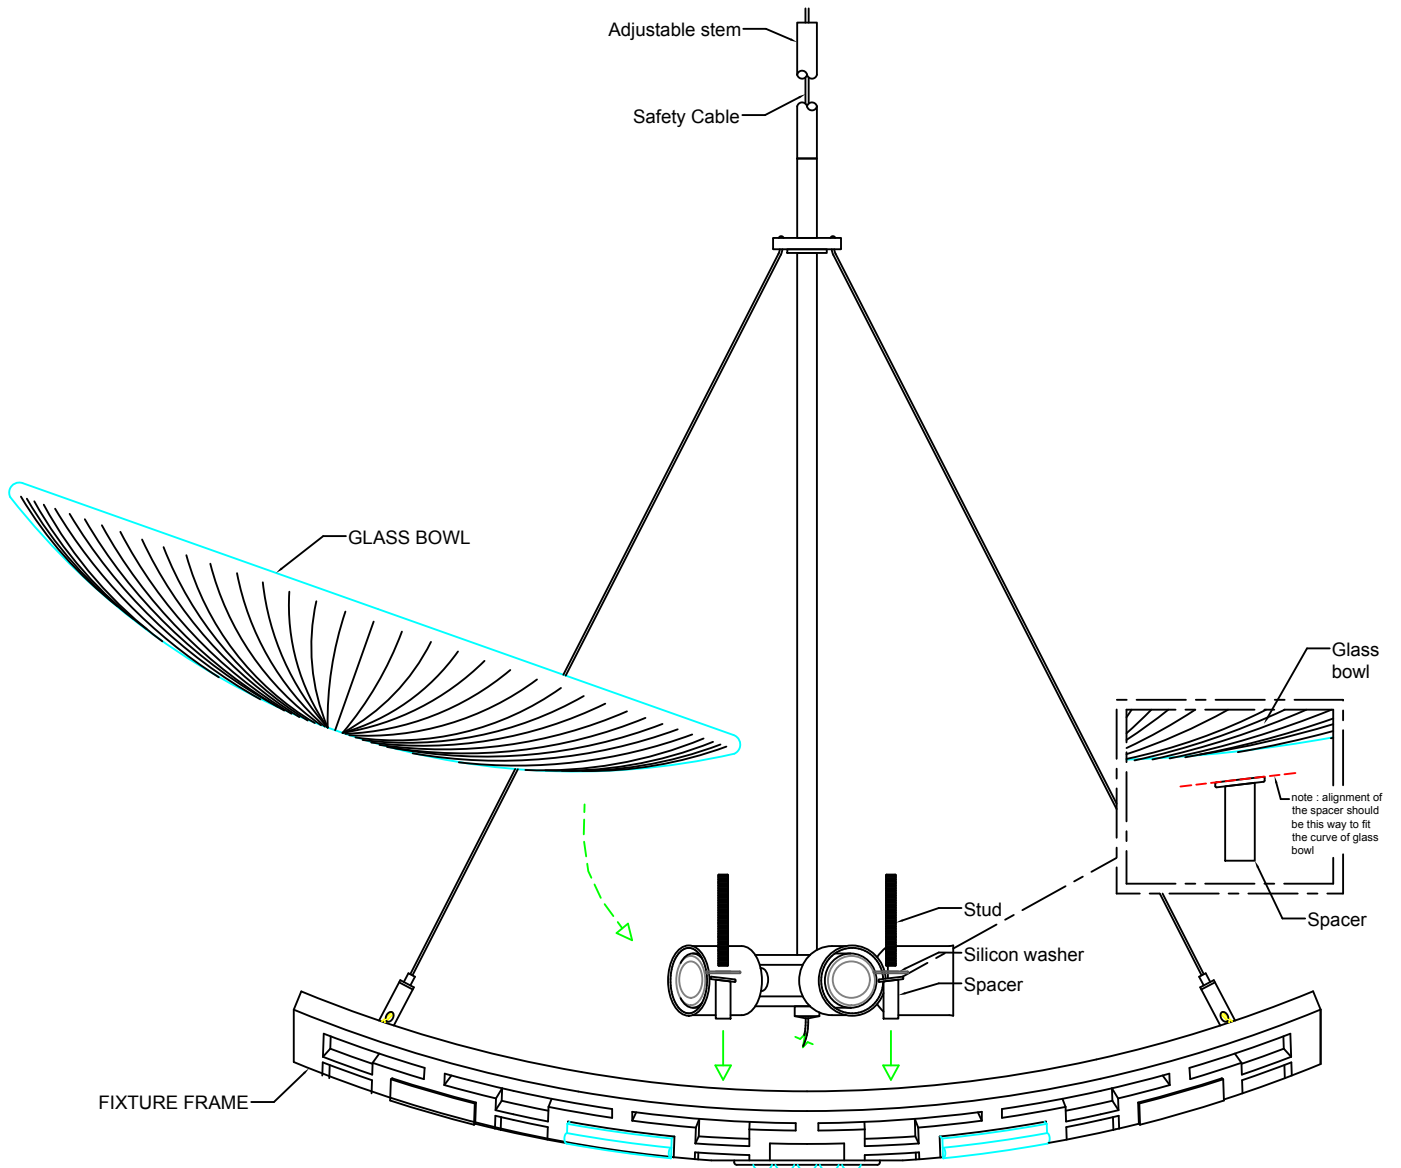
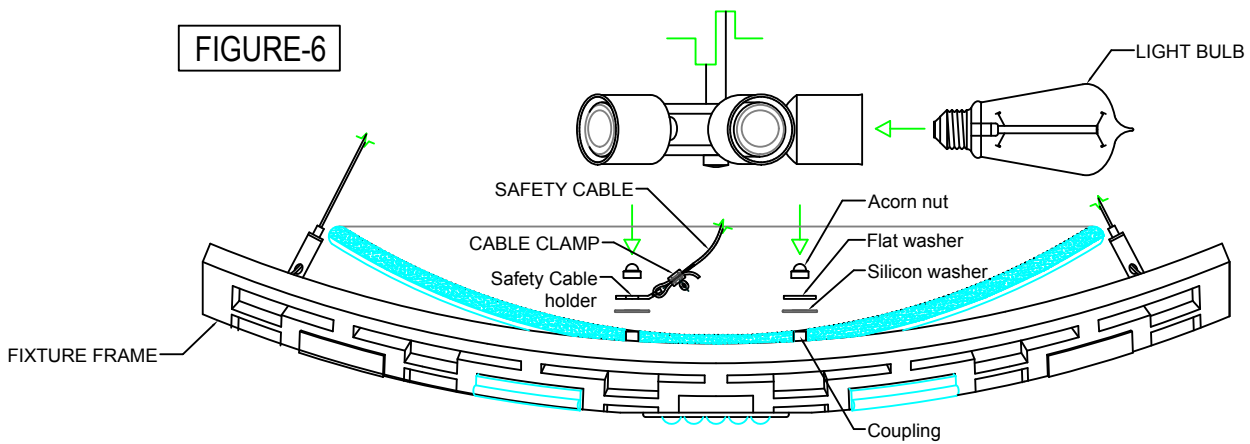


FIGURE-5




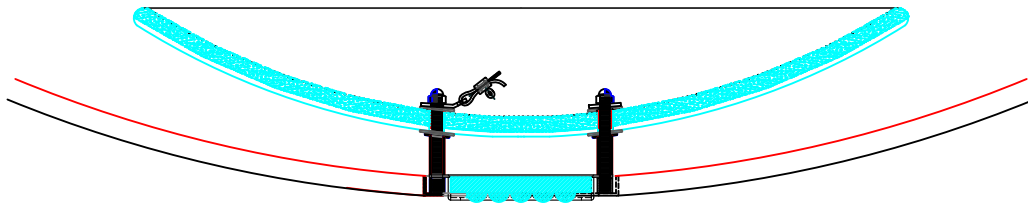


FIGURE-7

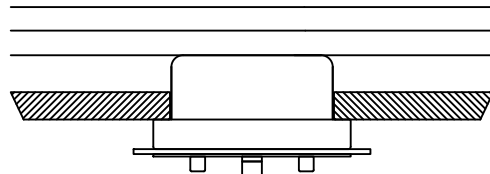

38" length Cable wire w/ metal ball (Suggested)

Note:  
After getting the desired  
length and proper  
alignment of the fixture,  
cut the excess cable  
wire.

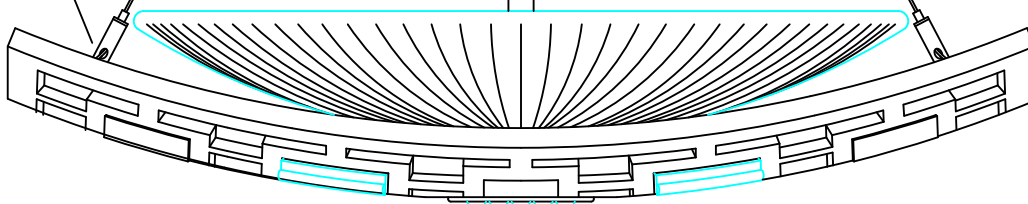


FIGURE-8