


ITEM	DESCRIPTION	PART NUMBER
1	MOUNTING PLATE	HDW-KBS1747806
2	MOUNTING SCREW	HDW-KBS1747806
3	HEX NUT	HDW-KBS1747806
4	TOOTH WASHER	HDW-KBS1747806
5	NIPPLE	HDW-KBS1747806
6	WIRE NUT	HDW-KBS1747806
7	GROUND SCREW	HDW-KBS1747806
8	CANOPY	CAS-KBS1747806
9	CONNECTOR	HDW-KBS1747806
10	16MM DIA STEM KIT 3"+6"+12"+18"+18"	STM-TC1600-SET-GL
11	FIXTURE ASSEMBLY	FAS-KBS1747806/808
12	THUMB SCREW	SCR-KBS1747806-T
13	GLASS DIFFUSER	DIF-KBS1747806/808
14	GLASS BOWL	GLS-KBS1747806/808
15	BULB	NOT INCLUDED
16	LOCKING ACCESSORY	FIN-KBS1747806
17	ACCESSORY	ACC-KBS1747806/808
18	METAL PLATE	FIN-KBS1747806
19	ALLEN WRENCH	HDW-KBS1747806
20	ALLEN SCREW	HDW-KBS1747806
21	SILICON WASHER	FIN-KBS1747806
22	METAL FRAME	FAS-KBS1747806/808
23	BALL NUT	HDW-KBS1747806-DIF
24	GLASS CLIP	HDW-KBS1747806-DIF
25	SILICON BUFFER	HDW-KBS1747806-DIF
26	SAFETY CABLE	CBL-KBS1747806
27	CABLE CLIP	CBL-KBS1747806

⚠ WARNING/CAUTION

- **DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE. READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**
- **TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES. THE INSTALLATION AND MAINTENANCE OF THIS UNIT SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.**
- **CALIFORNIA PROP 65: THIS LIGHTING FIXTURE CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, AND/OR OTHER REPRODUCTIVE HARM. WASH HANDS AFTER USE.**
- **REMOVE THE FIXTURE, PARTS AND PARTS BAG(S) FROM THE CARTON. BEFORE DISCARDING THE CARTON, DOUBLE CHECK TO MAKE CERTAIN THAT ALL PARTS ARE FOUND. INSPECT THE FIXTURE PRIOR TO INSTALLATION FOR ANY DAMAGE TO THE FIXTURE.**
- **DIMMING: THE FIXTURE CAN BE CONTROLLED BY A WALL DIMMING DEVICE. ONLY USE TRIAC/ELECTRONIC DIMMER. MAKE SURE THE CARTON IS MARKED FOR USE WITH LED COMPACT FLUORESCENT-INCANDESCENT LIGHT SOURCE ONLY. THESE CAN BE PROVIDED BY YOUR LOCAL ELECTRICAL DISTRIBUTOR, HOME CENTER, OR HARDWARE STORE.**
- **PLEASE CLEAN WITH A SOFT, DRY CLOTH ONLY! DO NOT USE CLEANSERS**

FIXTURE INSTALLATION

1. Feed the wire through the STEM (10) and twist tightly onto the FIXTURE ASSEMBLY (11). Keep adding additional stems until your desired hanging height is met.
2. Place the CANOPY (8) on top and slide it through the STEM (10), facing against the ceiling. Fully thread the CONNECTOR (9) onto the STEM (10) and the NIPPLE (5) onto the CONNECTOR (9). Thread the HEX NUT (3) onto the NIPPLE (5) along with TOOTH WASHER (4). Thread the MOUNTING PLATE (1) onto the NIPPLE (5) then secure with HEX NUT (3).
3. Pull the wire out from the junction box. Pull up and install the MOUNTING PLATE (1) onto the junction box using the MOUNTING SCREW (2). This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building. Attach the SAFETY CABLE (26) to the building structure or brace using CABLE CLIP (27).
4. Trim off the excess wire to a minimum 6" beyond the STEM (10) and strip each wire 1/2".
5. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bare copper wire) or the GROUND SCREW (7) on the MOUNTING PLATE (1). **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (6). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
8. Push the wires back into the junction box. Lift up the CANOPY (8) up to the ceiling and using ALLEN SCREW (20) (this fixture is supplied with ALLEN WRENCH (19)).
9. Attach the ACCESSORY (17) to the FIXTURE ASSEMBLY (11).
10. Slide the GLASS DIFFUSER (13) on the FIXTURE ASSEMBLY (11) and secure using THUMB SCREW (12).
9. Screw the BULB (15) into the socket of the FIXTURE ASSEMBLY (11). **THIS FIXTURE IS RATED FOR 40 WATT TYPE B LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. Attach the METAL FRAME (22) to the GLASS BOWL (14) and secure using the SILICON BUFFER (25), GLASS CLIP (24) and BALL NUT (23), then attach the GLASS BOWL (14) to the FIXTURE ASSEMBLY (11), insert the SILICON WASHER (21) and METAL PLATE (18) and secure using the LOCKING ACCESSORY (16).
11. Restore power to the outlet at the breaker or fuse box.

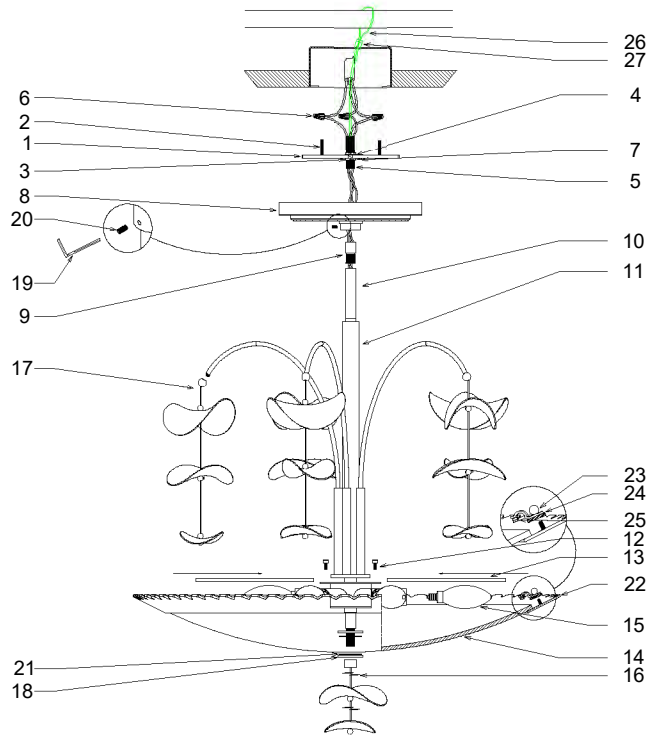

ITEM	DESCRIPTION	PART NUMBER
1	MOUNTING PLATE	HDW-KBS1747806
2	MOUNTING SCREW	HDW-KBS1747806
3	HEX NUT	HDW-KBS1747806
4	TOOTH WASHER	HDW-KBS1747806
5	NIPPLE	HDW-KBS1747806
6	WIRE NUT	HDW-KBS1747806
7	GROUND SCREW	HDW-KBS1747806
8	CANOPY	CAS-KBS1747806
9	CONNECTOR	HDW-KBS1747806
10	16MM DIA STEM KIT 3"+6"+12"+18"+18"	STM-TC1600-SET-GL
11	FIXTURE ASSEMBLY	FAS-KBS1747806/808
12	THUMB SCREW	SCR-KBS1747806-T
13	GLASS DIFFUSER	DIF-KBS1747806/808
14	GLASS BOWL	GLS-KBS1747806/808
15	BULB	NOT INCLUDED
16	LOCKING ACCESSORY	FIN-KBS1747806
17	ACCESSORY	ACC-KBS1747806/808
18	METAL PLATE	FIN-KBS1747806
19	ALLEN WRENCH	HDW-KBS1747806
20	ALLEN SCREW	HDW-KBS1747806
21	SILICON WASHER	FIN-KBS1747806
22	METAL FRAME	FAS-KBS1747806/808
23	BALL NUT	HDW-KBS1747806-DIF
24	GLASS CLIP	HDW-KBS1747806-DIF
25	SILICON BUFFER	HDW-KBS1747806-DIF
26	SAFETY CABLE	CBL-KBS1747806
27	CABLE CLIP	CBL-KBS1747806

ATTENTION PRUDENCE

- **DÉBRANCHEZ L'ALIMENTATION AVANT DE REMPLIR OU DE CÂBLER LE LUMINAIRE. LISEZ COMPLÈTEMENT TOUTES LES INSTRUCTIONS AVANT DE COMMENCER L'INSTALLATION**
- **POUR ÉVITER LE RISQUE D'INCENDIE OU D'ÉLECTROCUTION, LE LUMINAIRE DOIT ÊTRE INSTALLÉ CONFORMÉMENT À TOUS LES CODES ÉLECTRIQUES/DE CONSTRUCTION NATIONAUX ET LOCAUX APPLICABLES. L'INSTALLATION ET L'ENTRETIEN DE CET APPAREIL DOIVENT ÊTRE EFFECTUÉS PAR UN ÉLECTRICIEN AGRÉÉ OU UN TECHNICIEN CERTIFIÉ FORMÉ EN USINE.**
- **CALIFORNIE PROP 65 : CET APPAREIL D'ÉCLAIRAGE CONTIENT DES PRODUITS CHIMIQUES CONNUS PAR L'ÉTAT DE CALIFORNIE POUR PROVOQUER LE CANCER, DES MALADIES CONGÉNITALES ET/OU D'AUTRES DOMMAGES À LA REPRODUCTION. LAVER LES MAINS APRÈS UTILISATION.**
- **RETIRER LE LUMINAIRE, LES PIÈCES ET LE(S) SAC(S) DE PIÈCES DU CARTON. AVANT DE JETER LE CARTON, VÉRIFIEZ DOUBLE POUR VOUS ASSURER QUE TOUTES LES PIÈCES SONT TROUVÉES. INSPECTER LE LUMINAIRE AVANT L'INSTALLATION POUR TOUT DOMMAGE AU LUMINAIRE.**
- **GRADATION : LE LUMINAIRE PEUT ÊTRE CONTRÔLÉ PAR UN DISPOSITIF DE GRADATION MURALE. UTILISER UNIQUEMENT UN GRADATEUR TRIAC/ÉLECTRONIQUE. ASSUREZ-VOUS QUE LE CARTON EST MARQUÉ POUR UNE UTILISATION AVEC UNE SOURCE DE LUMIÈRE FLUORESCENTE À INCANDESCENCE COMPACTE UNIQUEMENT. CEUX-CI PEUVENT ÊTRE FOURNIS PAR VOTRE DISTRIBUTEUR ÉLECTRIQUE LOCAL, CENTRE À DOMICILE OU MAGASIN DE QUINCAILLERIE.**
- **VEUILLEZ NETTOYER UNIQUEMENT AVEC UN CHIFFON DOUX ET SEC ! N'UTILISEZ PAS DE NETTOYANTS**

FIXTURE INSTALLATION

1. Feed the wire through the STEM (10) and twist tightly onto the FIXTURE ASSEMBLY (11). Keep adding additional stems until your desired hanging height is met.
2. Place the CANOPY (8) on top and slide it through the STEM (10), facing against the ceiling. Fully thread the CONNECTOR (9) onto the STEM (10) and the NIPPLE (5) onto the CONNECTOR (9). Thread the HEX NUT (3) onto the NIPPLE (5) along with TOOTH WASHER (4). Thread the MOUNTING PLATE (1) onto the NIPPLE (5) then secure with HEX NUT (3).
3. Pull the wire out from the junction box. Pull up and install the MOUNTING PLATE (1) onto the junction box using the MOUNTING SCREW (2). This fixture is designed to be mounted on standard round or octagon junction box. The junction box must be securely mounted to the structure of the building. Attach the SAFETY CABLE (26) to the building structure or brace using CABLE CLIP (27).
4. Trim off the excess wire to a minimum 6" beyond the STEM (10) and strip each wire 1/2".
5. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bare copper wire) or the GROUND SCREW (7) on the MOUNTING PLATE (1). **NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
6. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (6). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. **MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
7. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. **NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!**
8. Push the wires back into the junction box. Lift up the CANOPY (8) up to the ceiling and using ALLEN SCREW (20) (this fixture is supplied with ALLEN WRENCH (19)).
9. Attach the ACCESSORY (17) to the FIXTURE ASSEMBLY (11).
10. Slide the GLASS DIFFUSER (13) on the FIXTURE ASSEMBLY (11) and secure using THUMB SCREW (12).
9. Screw the BULB (15) into the socket of the FIXTURE ASSEMBLY (11). **THIS FIXTURE IS RATED FOR 40 WATT TYPE B LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. Attach the METAL FRAME (22) to the GLASS BOWL (14) and secure using the SILICON BUFFER (25), GLASS CLIP (24) and BALL NUT (23), then attach the GLASS BOWL (14) to the FIXTURE ASSEMBLY (11), insert the SILICON WASHER (21) and METAL PLATE (18) and secure using the LOCKING ACCESSORY (16).
11. Restore power to the outlet at the breaker or fuse box.

Questions? We're here to help!

Contact us at CustomerService@hvlgroup.com