



# Architectural Lighting

Contemporary Illumination  
October 2015




CSL Lighting is renowned for innovation in Architectural Lighting design and technology and continues to create unique, intriguing luminaires. Our latest generation of Architectural Lighting fixtures, engineered and manufactured to the highest standards, offers lighting options defined by a dynamic blend of light and shape.

Our new line of luminaires features energy-saving LEDs and an array of finishes to complement any environment. All fixtures are UL approved for wet or damp locations.

Aura	28
Compass	8
Contour	22
Cube	4
Cube Linear	4
Echo	18
Glow	24
Glow Linear	26
Gravity	2
Hex	10
Omni	6
Radiator	20
Veil	16
Waymark	30
Wing Semi-Flush	12
Wing Wall	14
Finishes	32






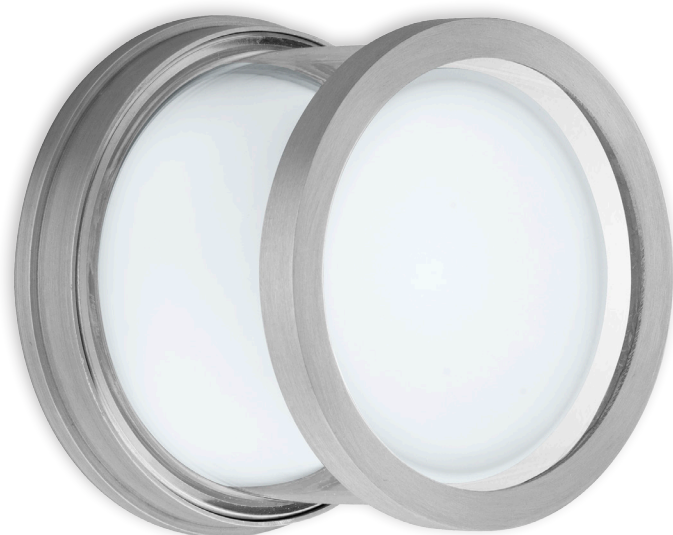


SS1012-27-SA




SS1012-27-BZ

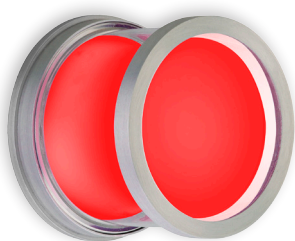


SS1012-RD-SA

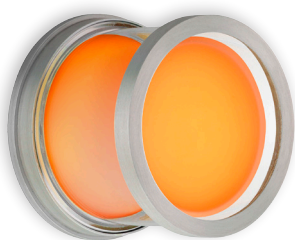


SS1012-AMB-SA

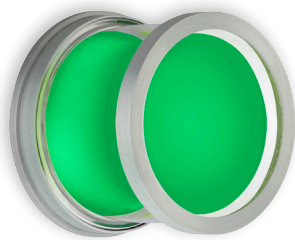

SS1012-GR-SA

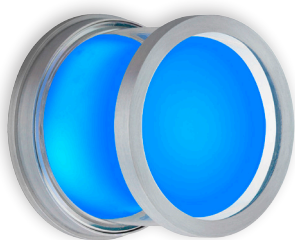

SS1012-BL-SA

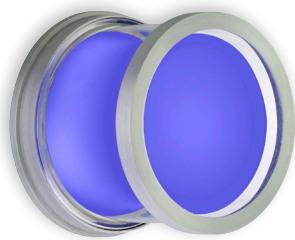

SS1012-BKL-SA

## SS1012

### Fixture

- 4¾" Ø x 4" p
- ADA
- 120V 9W LED, 630 lm
- 27-White – 2700°K ±50°, 90 CRI
- RD-Red – 625 nm
- AMB-Amber – 590 nm
- BL-Blue – 470 nm
- GR-Green – 530 nm
- BKL-Blacklight – 350 nm
- Non-dimming
- Wall and flush mount
- UL/C-UL listed for wet location

### Housing

- Diecast aluminum housing
- Opal glass inner diffuser with clear glass outer cylinder

### Finish

- Satin Aluminum, Bronze
- First color: LED color
- Second color: Housing



# Gravity


A compact wall- or flush-mounted fixture with diffused, even illumination in a variety of decorative colors





# Cube

A solid, geometric fixture emitting symmetrical direct illumination vertically from the cube form and horizontally from the linear version

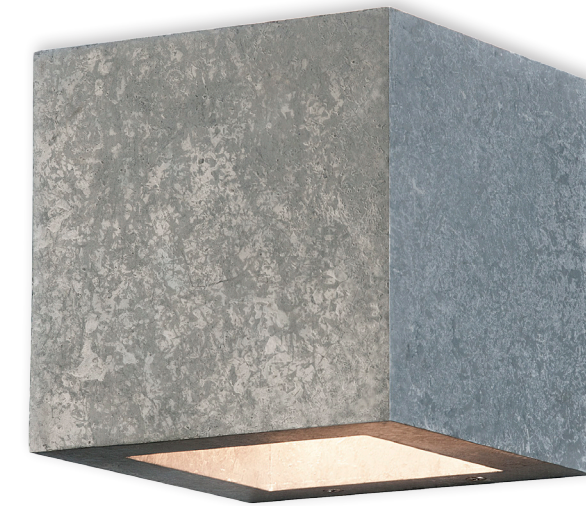

SS2001-GA

## Cube

SS2001

### Fixture


- 6" w x 6" h x 6" p
- 120V 18W LED, 840 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

### Housing

- Extruded aluminum housing

### Finish

- See finishes on page 32

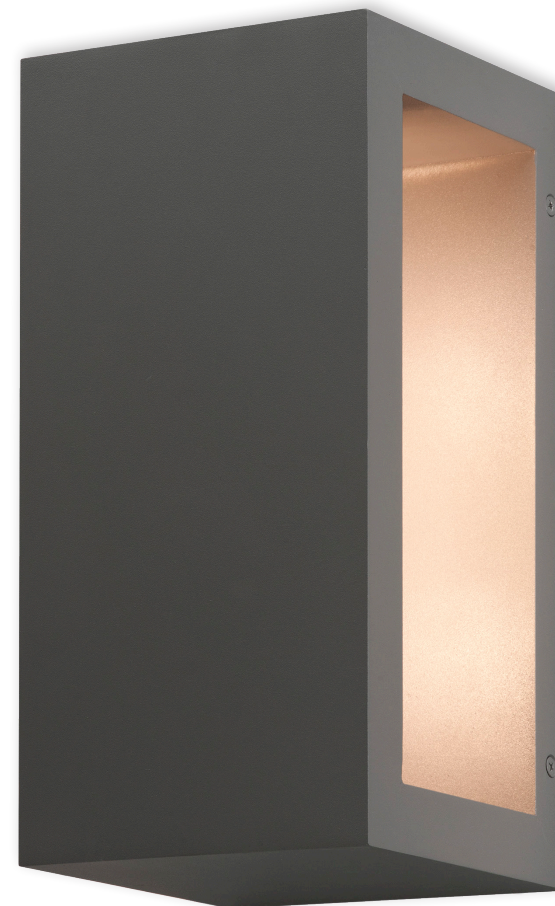

SS2001A-TBZ

## Linear Cube

SS2001A

### Fixture

- 6" w x 12" h x 6" p
- 120V 36W LED, 1680 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location


### Housing

- Extruded aluminum housing

### Finish

- See finishes on page 32




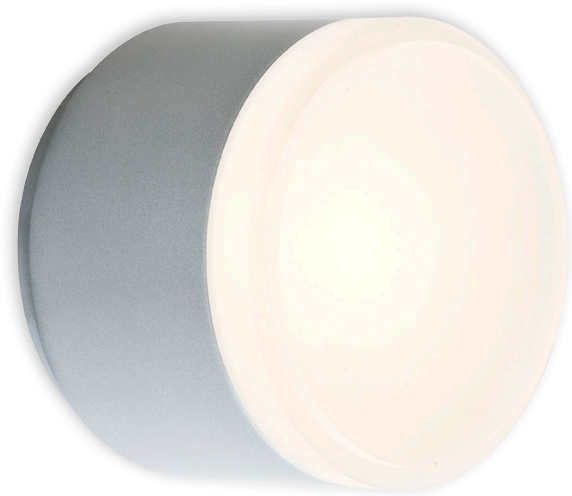

SS4015B-SS



SS4015C-TBZ

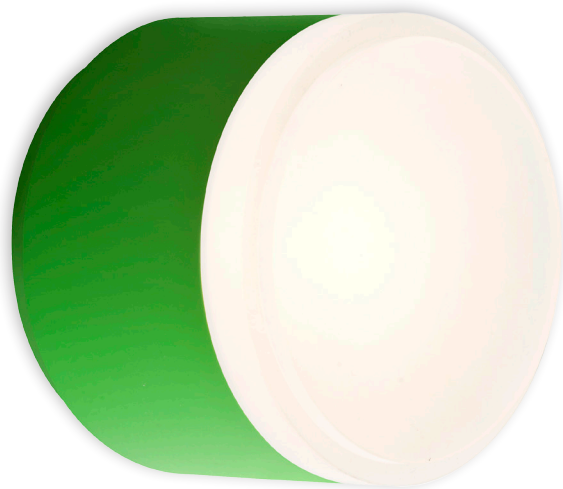

SS4015A-LG

## SS4015

### Fixture

- 5" Ø x 4¼" p
- 120V 18W LED, 840 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

### Housing

- Machined aluminum housing
- Machined acrylic diffuser
- Four machined acrylic diffuser options:  
A – Concave  
B – Stepped  
C – Inner Stepped  
D – Flat

### Finish

- See finishes on page 32



# Omni

A bold, decorative light source, wall- or flush-mounted singly or in multiples for even, ambient illumination





# Compass

A solid, dramatic fixture with optical-glass lenses casting illumination in multiple directions



SS3028C-SA

## SS3028C

### Fixture

- 4½" Ø x 4" p
- ADA
- 120V 9W LED, 630 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for wet location

### Housing

- Diecast and extruded aluminum housing
- Optical glass lens

### Finish

- Satin Aluminum, Bronze





# Hex

A smart, geometric fixture featuring warm, diffused illumination encased in a multi-colored hexagonal shape; available in two sizes

## SS2000

### Fixture

#### SS2000

- 14" w x 14" h x 3½" p
- ADA
- 120V 18W LED, 1260 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

#### SS2000A

- 8" w x 8" h x 3½" p
- ADA
- 120V 12W LED, 840 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

### Housing


- Stamped aluminum housing
- Molded acrylic lens/diffuser

### Finish


- See finishes on page 32  
First color: Housing  
Second color: Inner accent



SS2000-TBZ-TNG

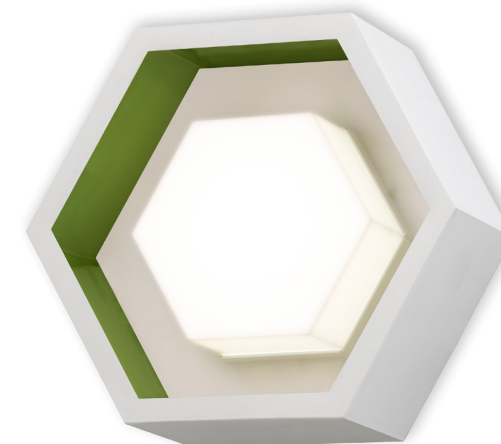

SS2000A-WT-LG

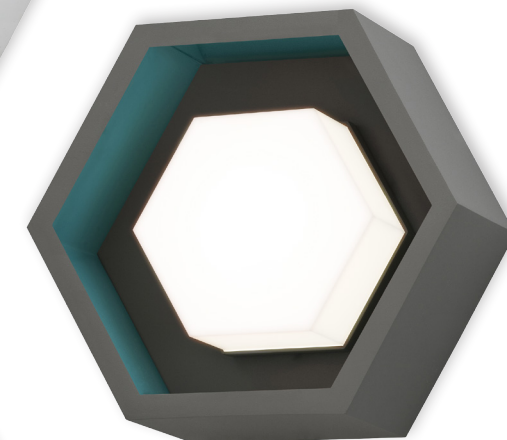

SS2000A-TGP-TTL



SS2000A-WT-TNG





# Wing Semi-Flush

A contemporary linear island light  
providing uniform indirect illumination



SS4017-WT

## SS4017

### Fixture

- 5" w x 27½" l x 9¼" h
- 120V 48W LED, 3360 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Flush mount
- UL/C-UL listed for damp location

### Housing

- Architectural aluminum

### Finish

- See finishes on page 32





# Wing Wall

A bold, modern wall-mounted 45° plane with wall-grazing, indirect illumination



SS4019-LG

## SS4019

### Fixture

- 16" w x 5½" h x 7" p
- 120V 24W LED, 1680 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location


### Housing

- Architectural aluminum

### Finish

- See finishes on page 32



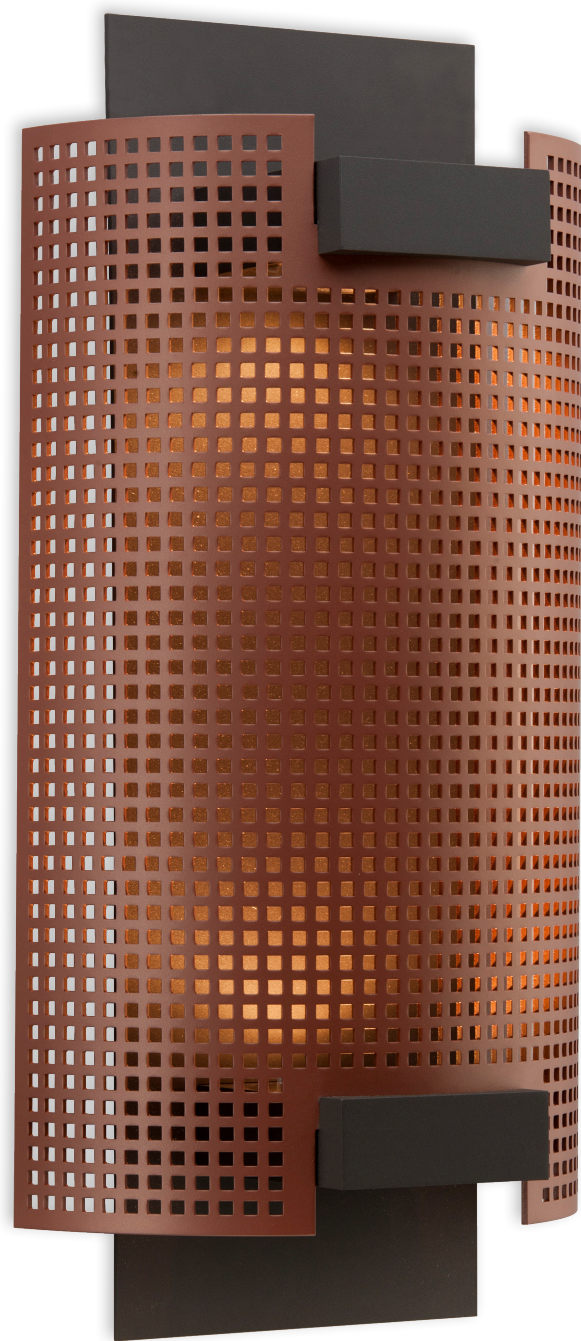

SS4001-TBZ-PNC

## SS4001

### Fixture

- 12" w x 24" h x 7" p
- 120V 36W LED, 2520 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

### Housing

- Machined aluminum housing
- Pierced aluminum shield

### Finish

- See finishes on page 32  
First color: Housing  
Second color: Shield



## Veil

A substantial, wall-mounted, indoor/outdoor fixture featuring a pierced aluminum diffuser which distributes a distinctive light pattern





SS4003-TBZ

## SS4003

### Fixture

- 9" w x 7" h x 3½" p
- ADA
- 120V 18W LED, 1260 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

### Housing

- Pierced aluminum housing

### Finish


- See finishes on page 32

## Echo

A wall-mounted fixture with a fluent, curved design with a pierced shield and louvers that distribute elegant diffused wall illumination and ambient light





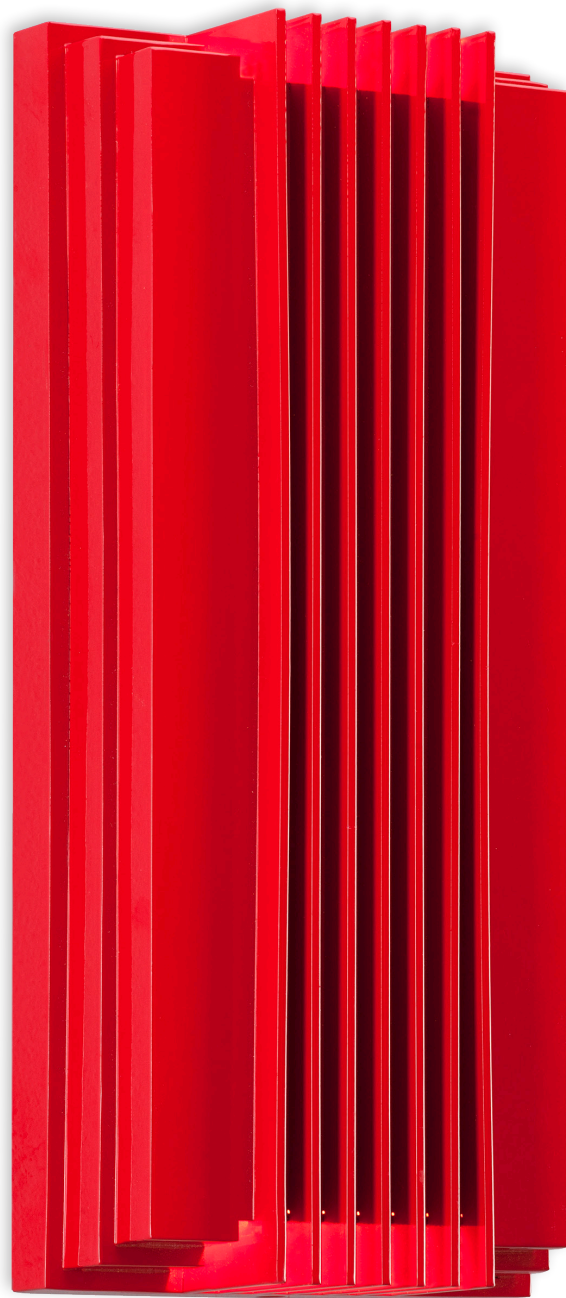

SS4018-RD

## SS4018

### Fixture

- 7" w x 15" h x 3¼" p
- ADA
- 120V 24W LED, 1680 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

### Housing

- Diecast aluminum housing

### Finish

- See finishes on page 32



## Radiator

A decorative, retro-style sconce with top and bottom louvers directing a vertical wash of light





SS4014-TGP

### SS4014

#### Fixture

- 7½" w x 12" h x 2½" p
- ADA
- 120V 18W LED, 1260 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

#### Housing

- Architectural aluminum

#### Finish

- See finishes on page 32



## Contour

An elegant silhouette sconce  
casting soft, warm illumination  
top and bottom





# Glow

A flat, framed fixture emitting light from the interior around a front colored plate and from behind for a surrounding soft glow

## SS4005

### Fixture


- 9" w x 16" h x 3¾" p
- ADA
- 120V 36W LED, 2520 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp listing

### Housing

- Architectural aluminum housing and accent plate

### Finish

- See finishes on page 32  
First color: Housing  
Second color: Accent plate

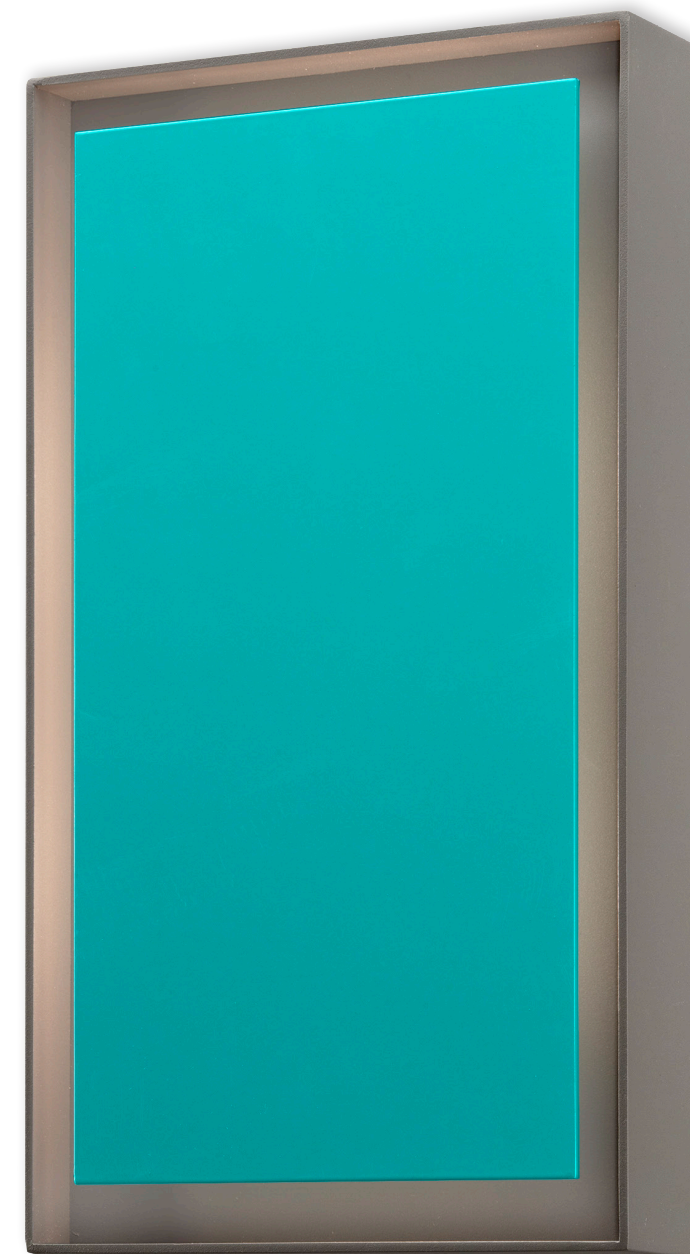

SS4005-TGP-TTL





# Glow Linear

An elegant, distinctive luminaire that glows around a front colored plate and illuminates walls with a dramatic light pattern

## SS4009

### Fixture

- 6½" w x 24½" h x 3¼" p
- ADA
- 120V 36W LED, 2520 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp listing

### Housing

- Architectural aluminum housing and accent plate

### Finish

- See finishes on page 32  
First color: Housing  
Second color: Accent plate



SS4009-MB-WT





SS4007-MB-GA

## SS4007

### Fixture

- 6" w x 12" h x 3¼" p
- ADA
- 120V 24W LED, 1680 lm  
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

### Housing

- Architectural aluminum housing and accent plate

### Finish

- See finishes on page 32  
First color: Housing  
Second color: Accent plate



## Aura

A framed sconce with soft illumination around the front color plate and light emitting left and right to create a striking wash on the walls





SS2002A-SGW  
WIFI




SS2002D-TBZ  
JAVA



SS2002E-TNG  
SMOKING



SS2002C-MB  
MARTINI



SS2002F-BLU  
TAKE A DIP



SS2002B-PNA  
RESTROOM

## SS2002

### Fixture

- 10" w x 10" h x 2¾" p
- ADA
- 120V 18W LED, 1260 lm  
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

### Housing

- Architectural aluminum housing
- CNC lasered aluminum accent plate
- Aluminum mounting plate
- Acrylic lens

### Finish

- See finishes on page 32



## Waymark

Colorful wall plates attract and inform with illuminated custom artwork in a variety of color options



# Finishes

Standard and Specialty Finishes can be specified for all fixtures, unless otherwise noted.

## Standard Finishes



**ABL** Aegean Blue



**BLU** Blue



**TTL** Tahitian Teal



**LG** Lime Green



**HG** Hunter Green




**TNG** Tangerine



**RD** Red



**BK** Gloss Black




**MB** Matte Black



**GWT** Gloss White



**WT** Semi-Gloss White



**DVG** Dove Gray




**FLG** Flannel Gray



**PNA** Painted Natural Aluminum




**SS** Satin Silver




**TGP** Textured Graphite



**PNC** Painted Natural Copper



**BZP** Bronze Patina




**TBZ** Textured Bronze




**BB** Burnished Bronze

## Specialty Finishes



**GA** Galvanized



**SA** Satin Aluminum

## Coastal Finish Option

The Coastal Finish is a coating which protects finishes on fixtures installed in coastal climates. To specify, add "-C" to end of order number.



## All CSL Architectural Fixtures:

- are UL and C-UL approved for wet or damp locations; see individual fixture details
- are compatible with incandescent dimming, unless otherwise noted
- are offered with Coastal Finish option, see page 32



## Index

1012	2	4005	24
2000	10	4007	28
2000A	10	4009	26
2001	4	4014	22
2001A	4	4015	6
2002	30	4017	12
3028C	8	4018	20
4001	16	4019	14
4003	18		





A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue  
City of Industry CA 91744  
Tel: 626.336.4511  
Fax: 626.330.4266  
[www.csllighting.com](http://www.csllighting.com)



C-CARCH10-15



782042000001

