
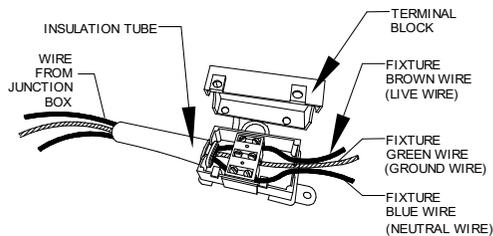


⚠ WARNING/CAUTION

- **DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE. READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**
- **TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES. THE INSTALLATION AND MAINTENANCE OF THIS UNIT SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.**
- **REMOVE THE FIXTURE, PARTS AND PARTS BAG(S) FROM THE CARTON. BEFORE DISCARDING THE CARTON, DOUBLE CHECK TO MAKE CERTAIN THAT ALL PARTS ARE FOUND. INSPECT THE FIXTURE PRIOR TO INSTALLATION FOR ANY DAMAGE TO THE FIXTURE.**
- **DIMMING: THE FIXTURE CAN BE CONTROLLED BY A WALL DIMMING DEVICE. ONLY USE TRIAC/ELECTRONIC DIMMER. MAKE SURE THE CARTON IS MARKED FOR USE WITH LED COMPACT FLUORESCENT-INCANDESCENT LIGHT SOURCE ONLY. THESE CAN BE PROVIDED BY YOUR LOCAL ELECTRICAL DISTRIBUTOR, HOME CENTER, OR HARDWARE STORE.**
- **PLEASE CLEAN WITH A SOFT, DRY CLOTH ONLY! DO NOT USE CLEANSERS**

FIXTURE INSTALLATION

1. **Attach the MOUNTING PLATE (1) to the junction box using the supplied TOX SCREW (3) AND MOUNTING SCREW (2).**
2. **Open the TERMINAL BLOCK (4).**
3. **Fasten the neutral wire from the junction box to the TERMINAL BLOCK (4), run it through the insulation tube and align it to the fixture blue wire. (See the figure by the left for reference) MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
4. **Fasten the live wire from the junction box to the TERMINAL BLOCK (4), run it through the insulation tube and align it to the fixture brown wire. (See the figure by the left for reference) MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
5. **Fasten the ground wire from the junction box to the TERMINAL BLOCK (4), run it through the insulation tube and align it to the fixture green wire. (See the figure by the left for reference) MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!**
6. **Close the TERMINAL BLOCK (4).**
7. **Peel the adhesive sticker on the back of the TERMINAL BLOCK (4) and paste it to the inside face of the backplate of the FIXTURE ASSEMBLY (5).**
8. **Attach the FIXTURE ASSEMBLY (5) to the MOUNTING PLATE (1) and secure using WASHER (7) and FLAT HEAD SCREW (6)**
9. **Install the BULB (8) into the socket of the FIXTURE ASSEMBLY (5). THIS FIXTURE IS RATED FOR 40 WATT 220 VOLT LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!**
10. **Restore power to the circuit breaker or fuse box.**

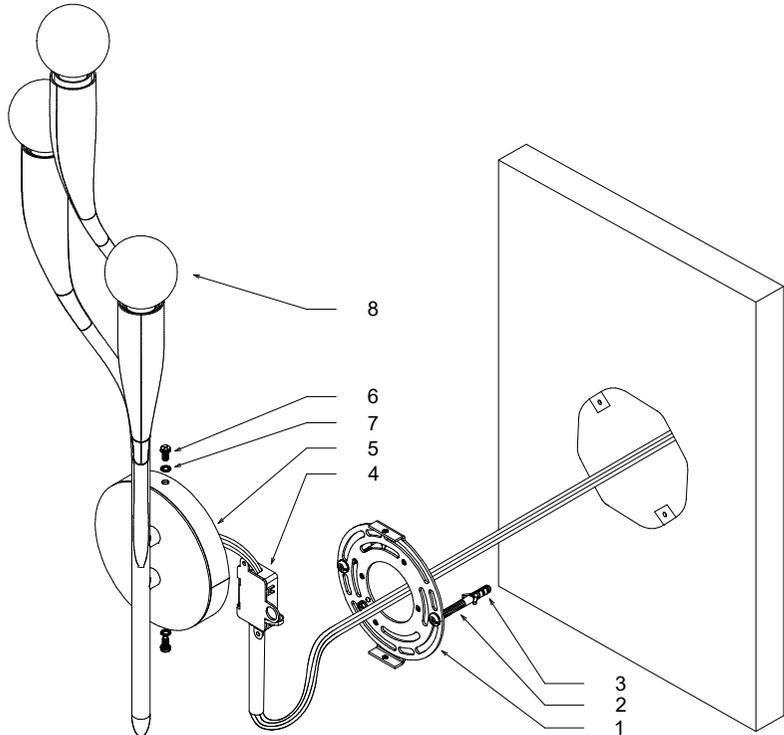

ITEM	DESCRIPTION
1	MOUNTING PLATE
2	MOUNTING SCREW
3	TOX SCREW
4	TERMINAL BLOCK
5	FIXTURE ASSEMBLY
6	FLAT HEAD SCREW
7	WASHER
8	BULB