

## **H411701 TESSA PENDANT**

## ASSEMBLY AND MOUNTING INSTRUCTIONS

#### **GENERAL**

- WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICAN
- FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.

- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

### INSTALLATION

STEP 1.	Feed the cord through the screw collar, canopy, nipple,		the wire nut with electrical tape.
	and mounting plate until you desired hanging height is met.	STEP 6.	Repeat the previous step with the hot (black wires). Make
STEP 2.	Tie an overhand knot to secure wire in place above the		sure there are no exposed wires or strands that could
	nipple, and trim off excess wire to min 6" beyond the knot.		cause a dangerous short circuit.
	Strip each wire end 5/8"		FAILURE TO CONNECT THE APPROPRIATE WIRES
STEP 3.	Attach the mounting plate to the outlet box using the		CORRECTLY COULD RESULT IN SEROIUS INJURY OR
	mounting screws.		DEATH!
STEP 4.	Fasten bare ground wire to ground wire from the wall outlet	STEP 7.	Carefully place wires into Outlet Box.
	box (usually green or copper color) or connect ground wire	STEP 8.	Place the canopy with the fixture over the outlet box and
	to green screw on the mounting plate.		fasten it by the screw collar.
STEP 5.	Connect the neutral (white) fixture wire coming from the	STEP 9.	Install the lamp. The fixture is rated for 60-watt A lamp.
	fixture base to neutral (usually white) outlet wire. Fasten		DO NOT EXCEED RECOMMENDED WATTAGE!
	both wires together with a plastic wire nut and tightly wrap	STEP 10.	Restore power to the circuit at breaker or fuse box.

### DIMMING

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware store.


#### **CLEANING**

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.





# ASSEMBLYANDMOUNTINGDIAGRAM

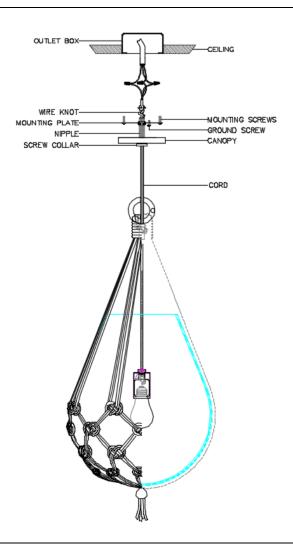

# WIRE NUT/TAPINGDIAGRAM

