



ASSEMBLY AND MOUNTING INSTRUCTIONS

GENERAL

- **WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED**
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN
- **FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH**
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.
- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

INSTALLATION

- | | |
|--|---|
| <p>STEP 1. Pull the wires out from the outlet box, and install mounting plate onto the outlet box using the (2) mounting screws.</p> <p>STEP 2. Thread the wire through stem and twist tightly onto body.</p> <p>STEP 3. Choose the length of the chain you need. (to remove excess chain section, use pliers to bend link open)</p> <p>STEP 4. Thread the fixture wire and the ground wire through the chain, collar, canopy and top loop assembly. Connect the chain to the loop and top loop.</p> <p>STEP 5. Trim excess wire to min 6" beyond stem, strip to 5/8" and twist.</p> <p>STEP 6. Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire to green screw on the mounting plate.</p> <p>STEP 7. Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire nut and tightly wrap</p> | <p>the wire nut with electrical tape.</p> <p>STEP 8. Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit.
FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH!</p> <p>STEP 9. Carefully place connections back into the outlet box.</p> <p>STEP 10. Attach the canopy to the mounting plate by inserting the top loop, then secure it with collar.</p> <p>STEP 11. Install the lamps. The fixture is rated for 4 watt LED type G9 lamp.
DO NOT EXCEED RECOMMENDED WATTAGE!</p> <p>STEP 12. Attach the glass shade onto fixture.</p> <p>STEP 13. Restore power to the circuit at breaker or fuse box.</p> |
|--|---|

DIMMING

The fixture can be controlled by a wall dimming device. Only use triac /electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware store.

CLEANING


Please clean with a soft, dry cloth ONLY! Do not use cleaning products.



mitzi
HUDSON VALLEY LIGHTING

H375812 ARIANA CHANDELIER

ASSEMBLY AND MOUNTING DIAGRAM

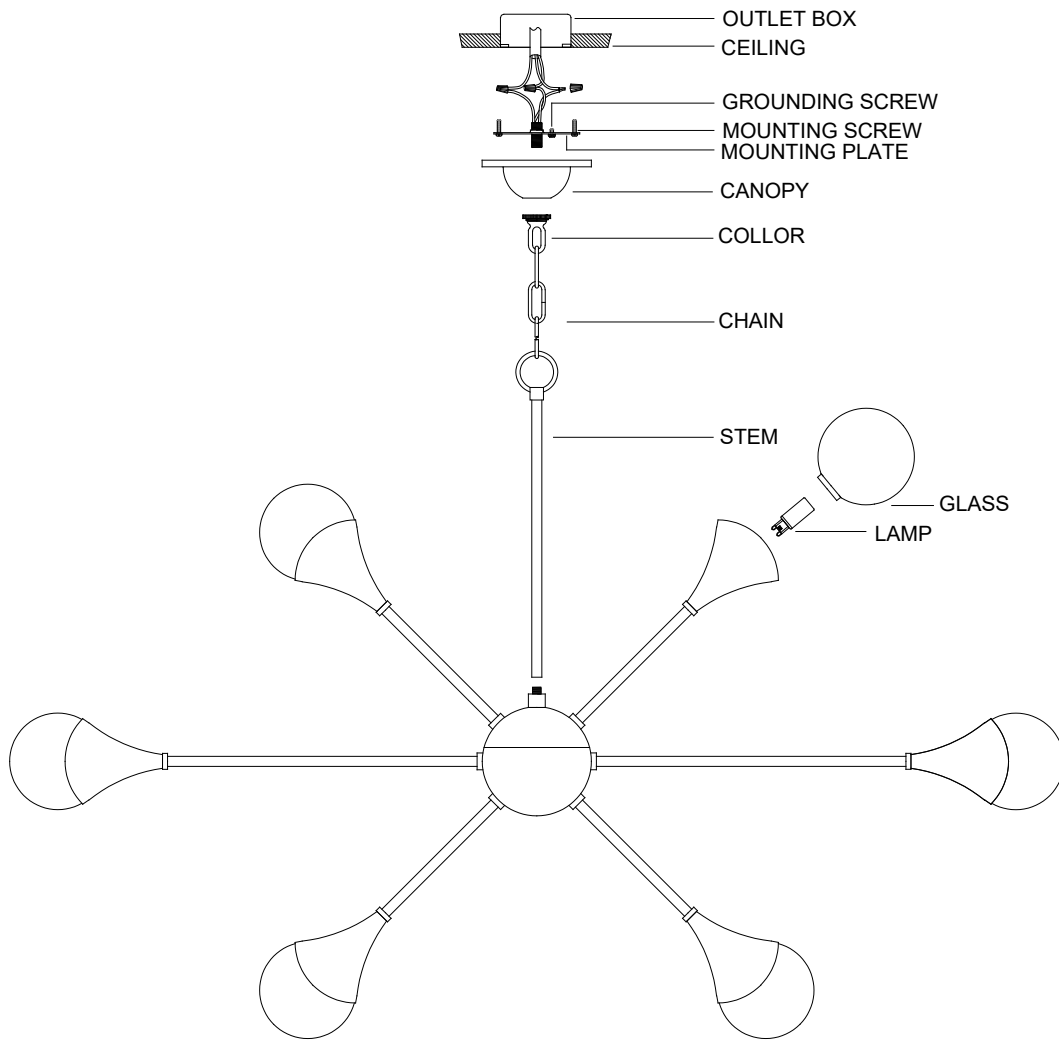

WIRE NUT/TAPING DIAGRAM

